



SCHWING
Stetter

SP 2800

Stationary concrete pump



Concrete output	max.	112 m ³ /h
Pressure on concrete	max.	108 bar
Engine output		132 - 168 kW
Machine weight		5,300 - 6,100 kg
		11,700 - 13,500 lb



RECORD BREAKING ENGINEERING

The SP 2800 from SCHWING

Reliable versatility.

SP 2800 Stationary concrete pump

Due to its high reliability and performance, the SP 2800 from SCHWING has been a central component of concrete logistics on construction sites all over the world for decades. Proven technologies, such as the robust and easy-to-clean ROCK concrete valve and the SCHWING hydraulic components, guarantee high reliability, a strong output rate and low maintenance costs. In combination with the customer-oriented SCHWING service, the SP 2800 ensures more safety and efficiency in concrete pumping. The SP 2800 from SCHWING: manufactured in Germany. Operating worldwide.



SP 2800 E

Cooling system

The heat development in the open hydraulic system of the SP 2800 is significantly lower than in closed systems. In connection with the large-volume hydraulic tank and the high-powered cooling system, the output rate of the SP 2800 thus remains constantly high even in the case of extreme external temperatures.



VarioPressure

With VarioPressure, the maximum concrete delivery pressure can be manually adjusted using a rotary handle, to protect concrete delivery lines from pressures that exceed their maximum pressure ratings.



Maintenance

The easy accessibility of the most important maintenance points of the SP 2800 reduces the time needed for daily maintenance to a minimum. The AdBlue/DEF container can be swiveled to the side for quick change of the pistons (SP 2800 D Stage V / Tier 4). Instead of fixed changing intervals, the hydraulic oil is changed based on the results of the oil analysis to be carried out by the owner. This reduces the maintenance costs and protects the environment.



ROCK concrete valve

In comparison with other concrete valves, the ROCK shows significantly lower wear due to its intelligent design. It is also quick to clean and is demonstrably easier to maintain. Advantage for the SP 2800: shorter servicing times, higher availability and lower maintenance costs.



SP 2800 D Stage V/Tier 4f



Motors for every need

Due to its reliability and energy efficiency, the available drives of the SP 2800 ensure high productivity and low operating costs.

Diesel engines

- 168 kW power, Stage III/Tier 3 exhaust emission standard
- 168 kW power, Stage IIIA/Tier 3 exhaust emission standard
- 168 kW power, Stage V/Tier 4f exhaust emission standard, diesel particulate filter and SCR system

Electric motors

- 132 kW power, 50 Hz, efficiency class IE 3
- 158 kW power, 60 Hz, efficiency class IE 3



The EcoClean procedure allows the placement of all concrete inside the pipeline for high-rise pumping. As such, material and disposal costs are reduced and the efficiency of the concrete pouring is increased. All stationary concrete pumps from SCHWING are prepared for the EcoClean procedure ex works.

Operation

The clear operating structure and large-format colour display of the machine control allow for easy and intuitive operation of the SP 2800. Machine data, operating modes and selected settings can be retrieved quickly and various parameters can be changed. The integrated diagnosis system supports safe operation and alerts the operator to the maintenance intervals.



Hydraulic system

Key hydraulic components of the SP 2800, such as the valve block and the differential cylinders, are developed and manufactured by SCHWING. Their generous dimensions and the open SCHWING hydraulic system guarantee a low-loss conversion of the engine power into the output rate. Result: the renowned high energy efficiency of SCHWING concrete pumps.




MADE IN GERMANY
by SCHWING-Stetter

SP 2800 Stationary concrete pump

The ROCK



Faster clean with less water.

Due to its straight design, in comparison to other concrete valves, the ROCK valve is easier and quicker to clean. It also provides a direct view into the delivery cylinder and of the pumping pistons. The pump kit can therefore be cleaned easily and conveniently within just two strokes. This saves water and reduces the time needed for cleaning.

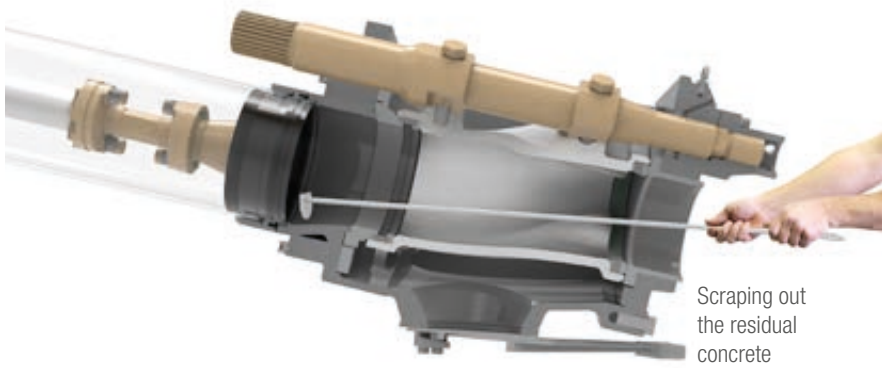

Intelligent wear protection.

The wear in the concrete valve is particularly high as the concrete is fed into the outlet at high pressure. In order to minimize this wear, at the most heavily loaded point of the ROCK concrete does not rub on steel, but rather on concrete. This is because the intelligent design of the ROCK leads to the formation of a concrete triangle after each shift. Protected by this concrete layer, the ROCK has a significantly longer service life than other concrete valves. For noticeably more profit per m³.

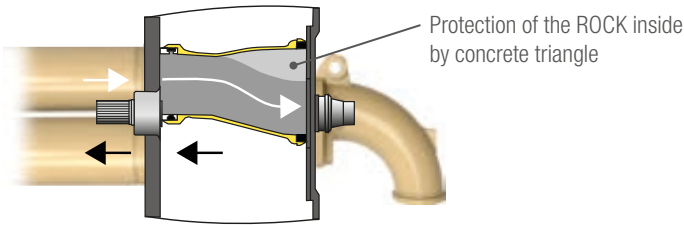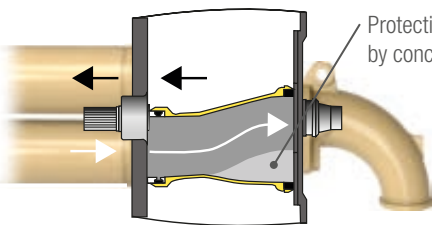

Easy maintenance.

The ROCK valve not only has a significantly longer service life than other concrete valves, it is also easier to maintain. After removing the housing cover, the wear parts are easily accessible and can be replaced quickly and safely. Time-consuming adjustment work is not required after replacement. And the number of wearing parts at 15 with the ROCK valve is just half as high as with other concrete valves. The maintenance of the ROCK valve: simple, fast and safe.



Options

Outlet options



For the connection of the pipeline chosen for the project (DN 100, DN 125 or DN 150) to the outlet of the SP 2800 (DN 150), suitable output options are available.

Hydraulic control unit



Components, such as a shut-off valve, can be easily operated by the SP 2800 (with up to 210 bar and up to 30 l/min) via the hydraulic control unit.

Remote controls



Cable remote control with 30 m cable

Radio remote control

Carbide wear parts



Due to the hardened surface, the carbide wear parts have a significantly longer service life than standard wear parts. As such, the maintenance effort and service costs are reduced, whilst the availability of the SP 2800 is increased.

More options

Concrete vibrator on the grid

Water pump

Standard equipment

Electrically driven ventilator

Four lashing eyes at the bottom

Four attachment points at the top

Central greasing strip at the hopper

Emergency-off button at the hopper

Batteries with 170 Ah

Supporting leg

Pressure gauge for hydraulic pressure





SP 2800 Stationary concrete pump

Technical data

Designation		SP 2800 D Stage III/Tier 3		SP 2800 D Stage V/Tier 4f	
Weight	kg	5,700		6,100	
Length (L)	mm	5,950		5,950	
Height (H)	mm	2,700		2,600	
Width (B)	mm	1,950		1,950	
Width (C)	mm	1,532		1,532	
Height (G)	mm	1,880		1,880	
Performance		rod-sided	piston-sided		
Pump kit		P1620			
Delivery cylinders	mm	200 × 1,600			
Concrete output max.	m³/hr	112	64		
Pressure on concrete max.	bar	60	108		
Stroke rate max.	1/min.	37	21		
Concrete valve		L-ROCK			
Hydraulic system					
Design		open system			
Hydraulic tank	l	400			
Motors					
Engine type		Diesel CAT C7.1		Diesel CAT C7.1	
Engine power	kW	168		168	
Emission standard		Stage III/Tier 3		Stage V/Tier 4f	
Emission control system		-		DPF + SCR	
Fuel tank	l	250		250	

Designation		SP 2800 E (50 Hz)		SP 2800 E (60 Hz)		
Weight	kg	5,800		5,800		
Length (L)	mm	5,950		5,950		
Height (H)	mm	2,080		2,080		
Width (B)	mm	1,950		1,950		
Width (C)	mm	1,532		1,532		
Height (G)	mm	1,880		1,880		
Performance		rod-sided	piston-sided			
Pump kit		P1620				
Delivery cylinders	mm	200 x 1,600				
Concrete output max.	m³/h	109	63			
Pressure on concrete max.	bar	60	108			
Stroke rate max.	1/min.	36	21			
Concrete valve		L-ROCK				
Hydraulic system						
Design		open system				
Hydraulic tank	l	400				
Motors						
Engine type		Electric motor		Electric motor		
Engine power	kW	132	158			
Frequenz	Hz	50	60			
Efficiency class		IE3		IE3		

Maximum concrete output and maximum pressure on concrete cannot be achieved simultaneously. DPF: Diesel particulate filter; SCR: selective catalytic reduction. Performance specifications are maximum theoretical values.

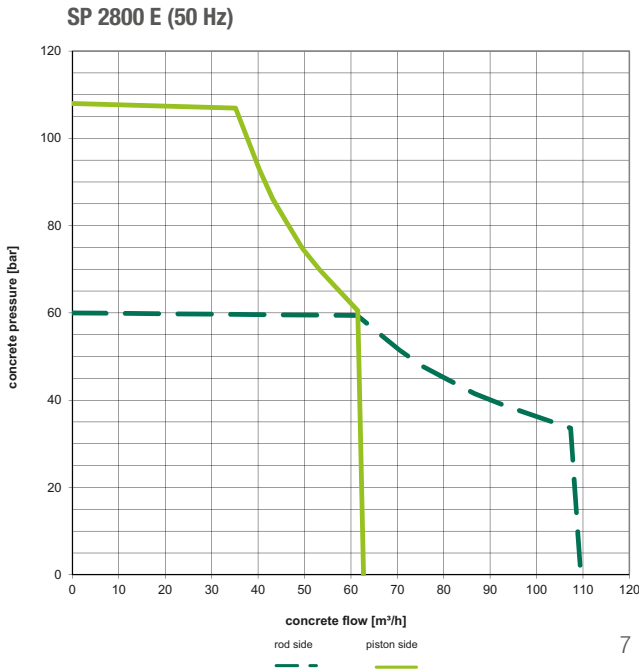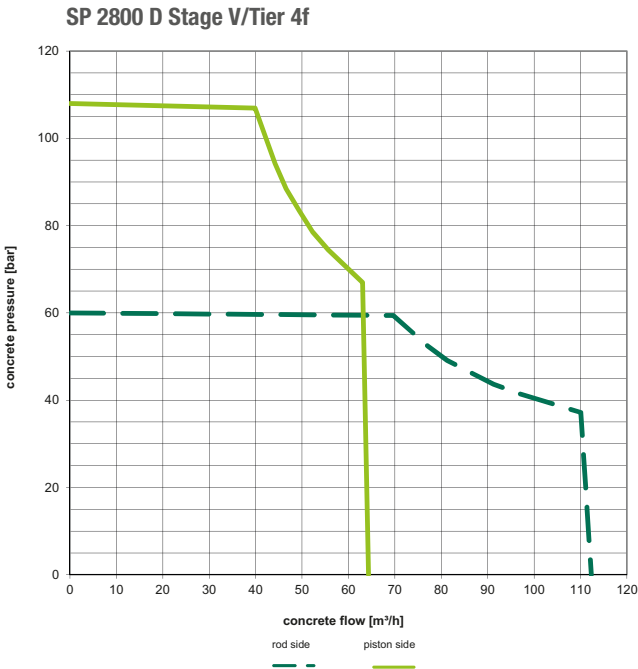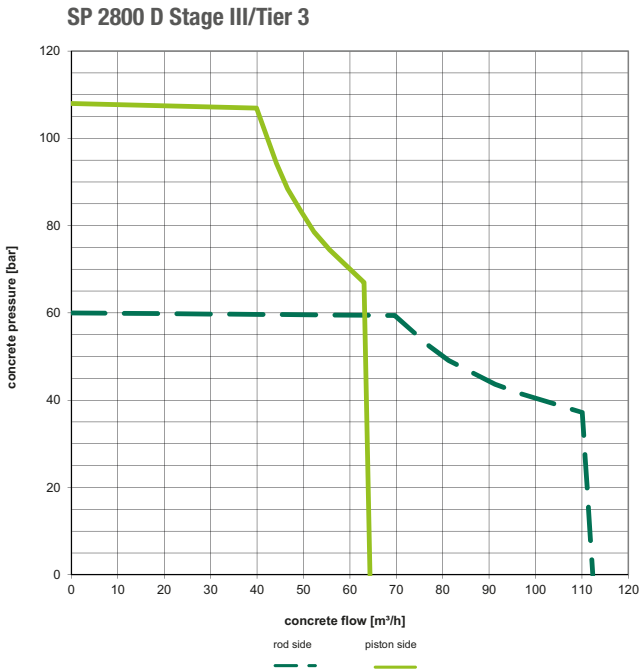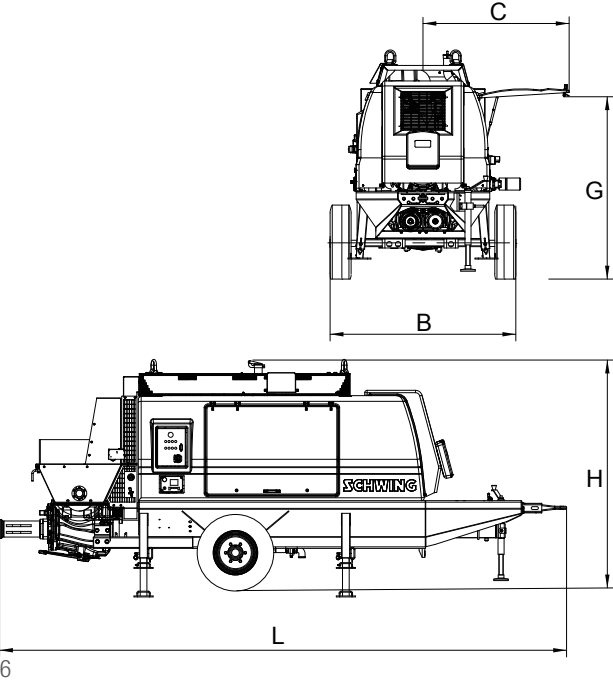



schwing-stetter



schwing.stetter



SCHWING stationary concrete pumps.
Performance and safety at all levels.



**SCHWING
Stetter**

SCHWING GmbH
Heerstrasse 9-27 · 44653 Herne, Germany
Phone +49 23 25 - 987-0 · Fax +49 23 25 - 72922
www.schwing-stetter.com · info@schwing.de

Stetter GmbH
Dr.-Karl-Lenz-Strasse 70 · 87700 Memmingen, Germany
Phone +49 83 31 - 78-0 · Fax +49 83 31 - 78 275
www.schwing-stetter.com · info@stetter.de

Subject to technical and dimensional modifications. Illustrations are non-binding. The exact standard specification, the scope of delivery and the technical data are detailed in the offer.